



## SP2PBSP2000

- SS316/CF8M
- Investment Castings for Body and Cap
- Internal Entry Blow-Out Proof Stem
- Pressure Rating: 2000PSI (PN125)
- Threaded Ends: CF8M
- Pressure Test: API 598



### MATERIAL LIST

| ITEM | PART          | MATERIAL | QTY |
|------|---------------|----------|-----|
| 1    | BODY          | CF8M     | 1   |
| 2    | BALL SEAT     | PTFE     | 2   |
| 3    | BALL          | CF8M     | 1   |
| 4    | BALL SEAL     | PTFE     | 1   |
| 5    | CAP           | CF8M     | 1   |
| 6    | STEM          | SS316    | 1   |
| 7    | THRUST WASHER | PTFE     | 1   |
| 8    | PACKING       | PTFE     | 1   |
| 9    | GLAND NUT     | SS304    | 1   |
| 10   | HANDLE        | SS304    | 1   |
| 11   | WASHER        | SS304    | 1   |
| 12   | NUT           | SS304    | 1   |
| 13   | LOCK DEVICE   | SS304    | 1   |
| 14   | HANDLE COVER  | PLASTIC  | 1   |

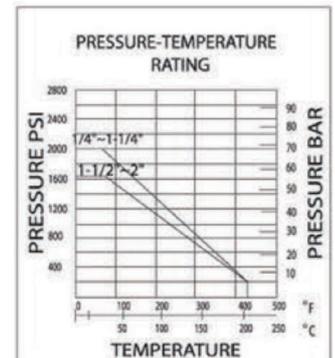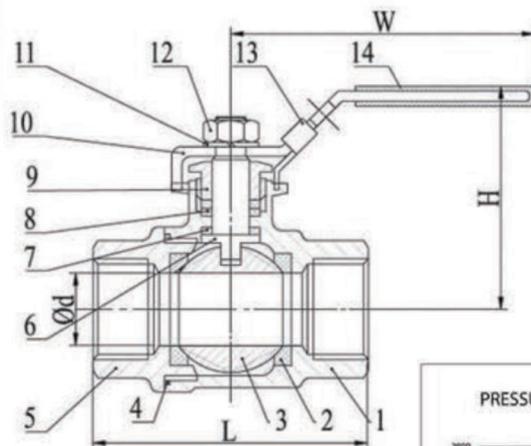

### DIMENSION TABLE

| SIZE   | D    | L     | H    | W   | N.M | KGS  |
|--------|------|-------|------|-----|-----|------|
| 1/4"   | 12.5 | 56.5  | 48   | 105 | 4   | 0.28 |
| 3/8"   | 12.5 | 56.5  | 48   | 105 | 4   | 0.28 |
| 1/2"   | 15   | 65.5  | 53   | 110 | 5   | 0.43 |
| 3/4"   | 20   | 77.5  | 62   | 135 | 8   | 0.59 |
| 1"     | 25   | 89.0  | 75   | 150 | 10  | 1.06 |
| 1-1/4" | 32   | 104.0 | 72.5 | 150 | 14  | 1.50 |
| 1-1/2" | 38   | 122.0 | 91   | 177 | 18  | 2.39 |
| 2"     | 50   | 124.5 | 102  | 183 | 25  | 3.40 |