

## SPWCVS



### Wafer spring loaded check valve

- 316 Stainless Steel
- 1000PSI (69 Bar) WOG
- ANSI150
- 1/2" - 4"



### DIMENSION TABLE

| SIZE  | d  | D   | D1   | D2  | L  | H   | KGS  | Op Value (mbar) |
|-------|----|-----|------|-----|----|-----|------|-----------------|
| DN15  | 15 | 39  | 28.5 | 32  | 16 | 3   | 0.09 | 23              |
| DN20  | 20 | 46  | 36.2 | 40  | 19 | 3   | 0.12 | 23              |
| DN25  | 25 | 54  | 43.3 | 46  | 21 | 3   | 0.16 | 23              |
| DN30  | 32 | 70  | 56   | 60  | 27 | 3.5 | 0.31 | 24              |
| DN40  | 40 | 83  | 68.5 | 72  | 31 | 3.5 | 0.43 | 25              |
| DN50  | 49 | 96  | 80.5 | 84  | 40 | 4   | 0.78 | 25              |
| DN60  | 62 | 115 | 99   | 103 | 46 | 5   | 1.03 | 26              |
| DN80  | 75 | 135 | 117  | 123 | 50 | 5   | 1.54 | 26              |
| DN100 | 85 | 153 | 135  | 140 | 60 | 6   | 2.25 | 27              |

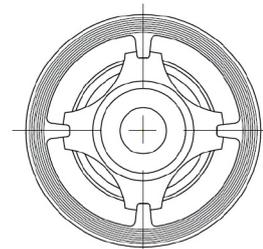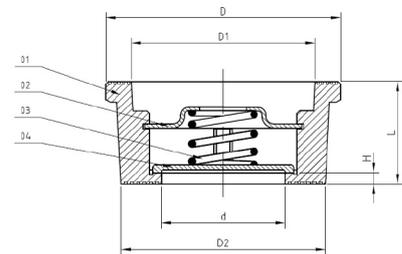

## SPDCV

- 316 Stainless Steel
- 150 lb pressure rating
- ANSI150
- 2" - 8"



### DIMENSION TABLE

| SIZE   | PRESSURE RATING | A     | B     | C     | DIA OF BOLT CIRCLE | WEIGHT KG |
|--------|-----------------|-------|-------|-------|--------------------|-----------|
| 2"     | 150lb           | 4.12" | 2.36" | 2.37" | 4.75"              | 2.5       |
| 2 1/2" | 150lb           | 4.87" | 2.87" | 2.62" | 5.5"               | 3         |
| 3"     | 150lb           | 5.37" | 3.5"  | 2.87" | 6"                 | 4.5       |
| 4"     | 150lb           | 6.87" | 4.49" | 2.87" | 7.5"               | 8         |
| 6"     | 150lb           | 8.75" | 6.61" | 3.87" | 9.5"               | 13        |
| 8"     | 150lb           | 11"   | 8.62" | 5"    | 11.75"             | 28        |

