


SP1PWM

- Investment Casting Body
- SS316/CF8M
- Internal Entry Blow-Out Proof Stem
- Pressure Rating: 1000psi (PN63)
- End Connections: BSP
- Locking Device



MATERIAL LIST

ITEM	PART	MATERIAL	QTY
1	BODY	CF8M	1
2	BALL SEAT	PTFE	2
3	BALL	SS316	1
4	CAP	PTFE	1
5	STEM	CF8M	1
6	THRUST WASHER	PTFE	1
7	STEM PACKING	PTFE	1
8	LOCK WASHER	PTFE	1
9	SPRING WASHER	SS304	1
10	HANDLE NUT	SS304	1
11	STOP PIN	SS304	1
12	HANDLE	SS304	1
13	HANDLE SLEEVE	PLASTIC	1

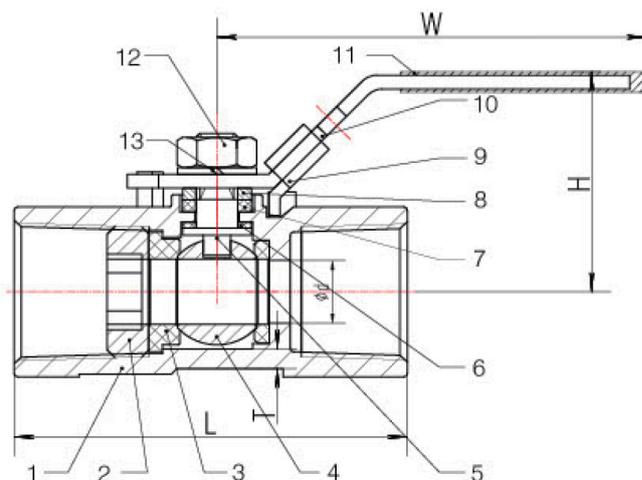

DIMENSION TABLE

SIZE	d	L	H	L1	L2	N.M	KGS
1/4"	5	40	32	11.5	15.2	4	0.06
3/8"	7	45	33	13.2	15.6	4	0.09
1/2"	9.5	56	42	17.5	22.0	6	0.15
3/4"	12.5	59	45	16.6	22.1	6	0.22
1"	15	71	48	20.1	26.0	8	0.36
1-1/4"	20	76	58.3	19.8	27.6	10	0.55
1-1/2"	25	85	67	21.0	29.7	14	0.86
2"	32	99	74.5	23.5	31.7	15	1.29
2-1/2"	38	110	85	24	25	25	2.15
3"	50	132	85	24.5	29	40	3.4
4"	64	180	121.5	22.5	48	48	5.9