


SP3PWM

- Investment Casting For Body and Cap
- SS316/CF8M
- Internal Entry Blow-Out Proof Stem
- Pressure Rating: 1000psi (PN63)
- End Connections: BSP
- Locking Device
- Pressure Test: API 598



MATERIAL LIST

ITEM	PART	MATERIAL	QTY
1	BODY	CF8M	1
2	SEAT	PTFE	2
3	BALL	SS316	1
4	WASHER	PTFE	1
5	CAP	CF8M	1
6	STEM	SS304	1
7	THRUST WASHER	PTFE	1
8	STEM PACKING	PTFE	1
9	LOCK WASHER	PTFE	1
10	HANDLE	SS304	1
11	SPRING WASHER	SS304	1
12	HANDLE NUT	SS304	1
13	STOP PIN	SS304	1
14	HANDLE SLEEVE	PLASTIC	1

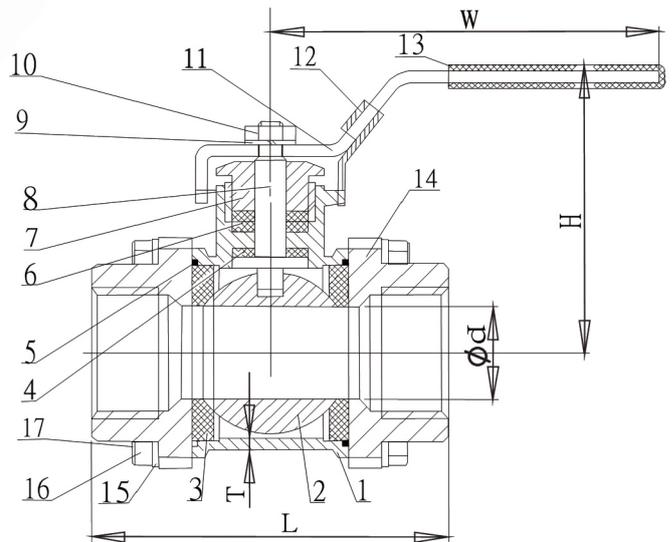

DIMENSION TABLE

SIZE	ØD	DN	L	W	H	SW	WEIGHT(KG)	T
1/4"	11	8	50	105	47	19	0.17	2.75
3/8"	12.5	10	60	105	51	22	0.22	2.75
1/2"	15	15	75	118	56	26	0.3	2.25
3/4"	20	20	80	118	58.5	31	0.38	2.25
1"	25	25	90	150	74	38	0.61	2.5
1-1/4"	32	32	110	150	79	48	0.98	3
1-1/2"	40	40	120	182	92	54	1.59	3.5
2"	50	50	140	182	103	68	2.58	4
2-1/2"	65	65	185	254	118	84	5.33	4.5
3"	80	80	205	254	118	98	7.82	5
4"	100	100	240	285	144	125	16.35	6